


LITHIUM BUTTON CELL

CR2016



Dimensions

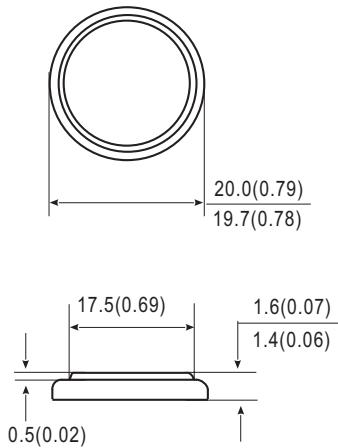

Unit:mm(inch)

Chemical System:	Lithium/Manganese Dioxide
IEC Name:	CR 2016
ANSI/NEDA:	5000LC
Camelion Model:	CR2016
Average Weight:	2.0g
Dimension(∅ x H):	20.0 ^{-0.3} x1.6 ^{-0.2} mm 0.79 ^{-0.01} x0.06 ^{-0.01} inch
Terminals:	Flat
Nominal Voltage:	3.0Volts
Capacity:	75mAh (Rated at 30kΩ to 2.00V)
Standard Discharge Current:	0.1mA
Max. Continuous Discharge Current:	0.3mA
Max. Pulse Discharge Current:	10.0mA
Operating Temperature:	-20°C-60°C
Storage Temperature:	18°C-28°C
Relative Humidity:	60±15%
Cross Reference:	E-CR2016(Energizer) DL2016(Duracell) KECR2016(Rayovac)

Usage Guide



Calculator



Remote control



Electronic scales

Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.


Handling

- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- (2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- (3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- (4) In case the battery electrolyte happen to come into mouth, gargle well enough and consult a doctor immediately.


LITHIUM BUTTON CELL

CR2016


Discharge Characteristics

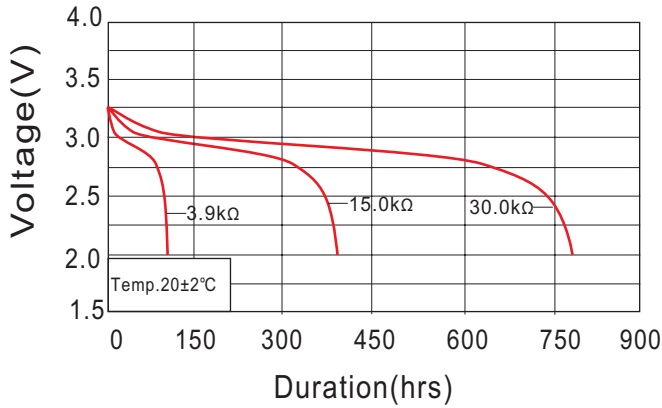


Temperature Characteristics

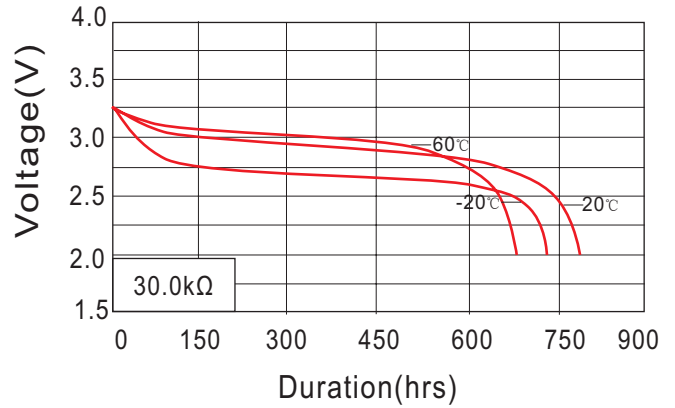


Load-capacity Characteristic

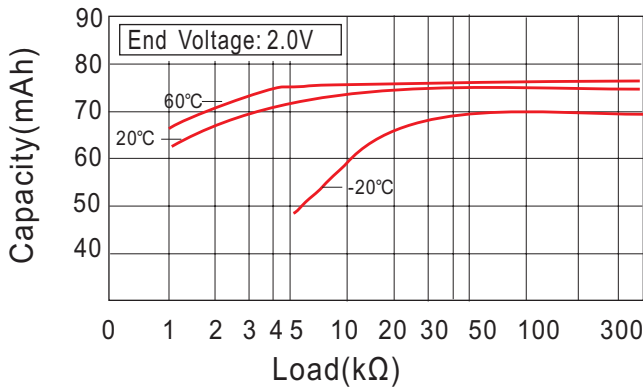

Operating Voltage

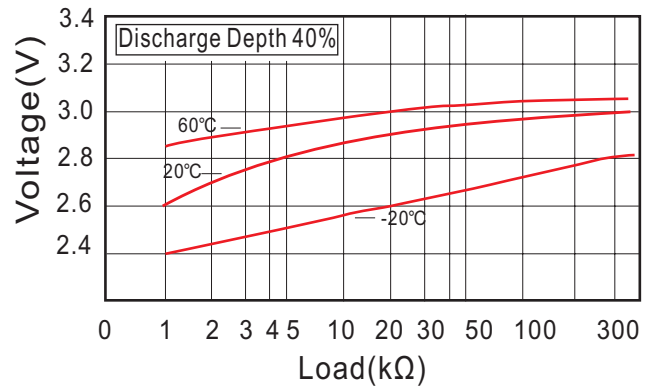

Pulse Discharge Characteristic

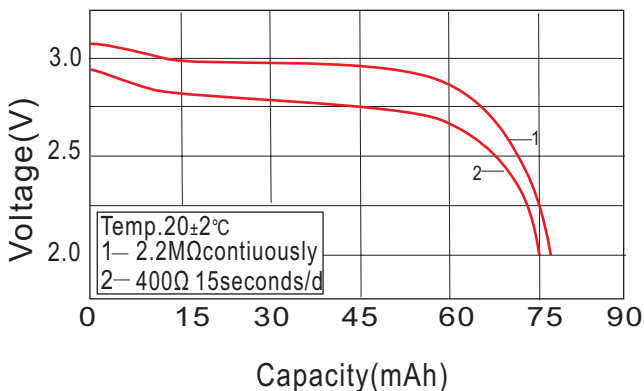

Storage Characteristic

